


PF-LPLN-B0

CPP Film – Transparent

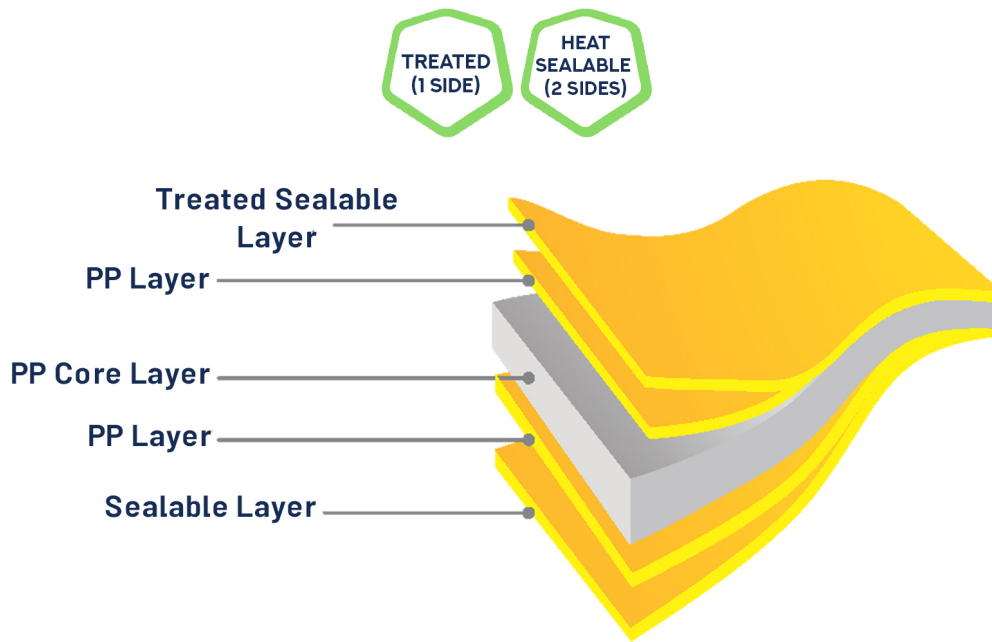

Application : It can be used as a single ply or lamination substrate. Excellent hot tack property allows to use this film in many applications such as bakery, pasta and powder packaging.

Technical Data	Specification	Unit	Value		
	Thickness	μm	25	30	40
PF-LPLN-B0	Yield	m ² / Kg	44	36.6	27.5
	Unit weight	g/m2	22.73	27.32	36.36

Logistic Data	MOQ (Minimum Order Quantity)
PF-LPLN-B0	40ft HC Container

Benefits & Options

- * treated (1 side)
- * heat sealable (2 sides)
- * Conformity Declaration (FDA/ EU)
- * Excellent gloss and transparency
- * Excellent hot tack and sealing properties
- * Good machinability
- * Excellent ink and adhesive adhesion
- * One side corona treated
- * Food Grade Material / FDO Certified
- * All thicknesses between 18 - 90 μm can be produced upon request.
- * Minimum order can include multiple types (negotiable for trials)